


**INTECUT-S**



**Upgrade model**

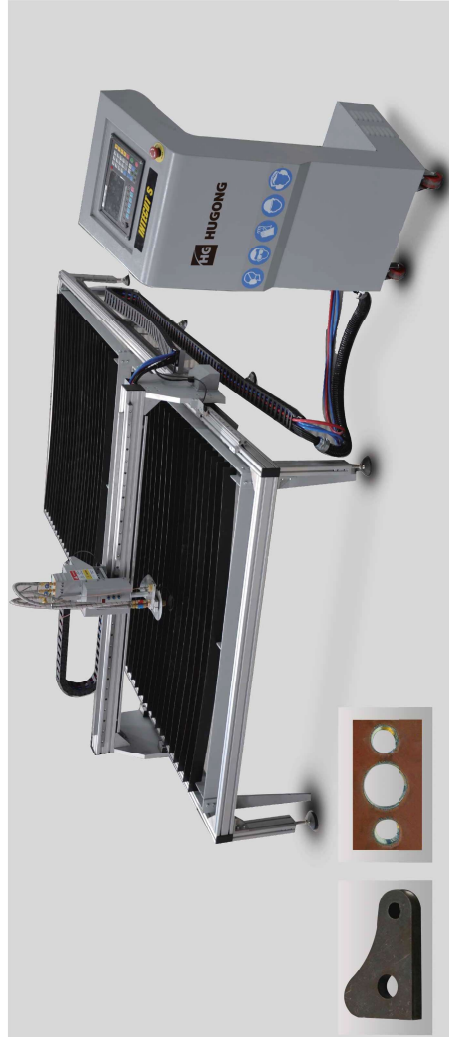

**● Specification**

|                              |  |
|------------------------------|--|
| Model                        | INTECUT S  |
| Power supply                 | 1PH, 220V, 50HZ (Customised voltage is available)                      |
| Input capacity (KW)          | 130  |
| Controller display           | 7" LCD, colorful   |
| Cutting width (mm)           | 1500   |
| Cutting length               | 3000mm, 4000mm. Customised length is available                         |
| Cutting model                | Flame or Plasma  |
| Positioning speed (mm/min)   | 5000   |
| Flame cutting thickness (mm) | 60   |
| Flame cutting speed (mm/min) | 100-750  |
| Oxygen pressure              | ≤1.5Mpa  |
| Cutting gas                  | LPG, Propane, Acetylene  |
| Plasma                       | Up to 125A. Highly recommend Hypertherm/Victor to achieve good quality |
| Nesting software             | FastCAM Pro/Promet   |

**Working process**

